FS-97D

User's Manual

Edition: 1.1
2009/03/16

Copyright

Copyright 2008. All rights reserved. This document is copyrighted and all rights are reserved. The information in this document is subject to change without prior notice to make improvements to the products.
This document contains proprietary information and protected by copyright. No part of this document may be reproduced, copied, or translated in any form or any means without prior written permission of the manufacturer.
All trademarks and/or registered trademarks contains in this document are property of their respective owners.

Disclaimer

The company shall not be liable for any incidental or consequential damages resulting from the performance or use of this product.
The company does not issue a warranty of any kind, express or implied, including without limitation implied warranties of merchantability or fitness for a particular purpose.
The company has the right to revise the manual or include changes in the specifications of the product described within it at any time without notice and without obligation to notify any person of such revision or changes.

Trademark

All trademarks are the property of their respective holders.

Any questions please visit our website at http://www.commell.com.tw.

Packing List

Please check package component before you use our products.

Hardware:

FS-97D Full-Size CPU card x 1

Cable Kit:

Floppy flat cable x 1

PS/2 Keyboard & Mouse Cable x 1

4-pin to 3-pin ATX cable x 1

SATA Cable x 2



Printer Port Cable x 1

(FS-97DDG2/XG2 Only)

COM Port Cable x 1

(FS-97DDG2/XG2 Only)

Audio Port Cable x 1



USB Cable x 2

DVI module with bracket x 1

(FS-97DDG Only)

DVI module with bracket x 1

(FS-97DDG2/D2G2 Only)



Comport Printer Cable x 1

(FS-97DXG & FS-97DG Only)

Comport Cable x 1

(FS-97DDG2 FS-97DXG2 FS-97DD2G2 Only)

Other Accessories:

Divers CD (including User's Manual) x 1

RAID drivers Disc for Windows 2000, Windows XP and Windows Server 2003

Index

Chapter1 <Introduction> 8
1.1 <Product Overview> 8
1.2 <Product Specification> 9
1.3 <Block Diagram> 11
1.4 <Mechanical Drawing > 12
Chapter 2 <Hardware Setup> 13
2.1 <Connector Location> 13
2.2 <Jumper Reference> 14
2.3 <Connector Reference> 15
2.3.1 <Internal Connectors> 15
2.3.2 <External Connectors> 15
2.4 <CPU and Memory Setup> 16
2.4.1 <CPU installation> 16
2.4.2 <Memory installation> 17
2.5 <CMOS Setup> 18
2.6 <Serial ATA installation> 19
2.7 <LAN Interface> 20
2.8 <Onboard Display Interface> 21
2.8.1 <Analog Display> 21
2.8.2 <LVDS Display FS-97DXG＆XG2 Only > 22
2.8.3 <DVI Display FS-97DDG/ DG2 Only > 26
2.9 <Audio Installation> 27
2.11 <GPIO interface> 29
2.12 <USB2.0 Interface> 30
2.13 <Power and Fan Installation> 31
2.14 <Serial Port> 33
2.15 <Switch and Indicator> 35

Chapter 3 <System Configuration> 37
3.1 <SATA configuration> 37
3.2 <SATA RAID Configuration> 38
3.3 <Audio Configuration> 43
3.4 <Video Memory Setup> 44
3.5 <Display Properties Setting> 46
Chapter 4 <BIOS Setup> 48
Appendix A <I/O Port Pin Assignment> 50
A.1 <Serial ATA Port> 50
A.2 <IrDA Port> 50
A.3 <VGA Port> 50
A.4 <LAN Port> 51
A.5 <Floppy Port> 51
A.6 <Parallel Port> 52
Appedix B <System Resources> 53
Appedix C <Flash BIOS> 56
C.1 <BIOS Auto Flash Tool> 56
C.2 <Flash Method> 56
Appendix D <Programming GPIO's> 57
Appendix E <Watch Dog timer Setting > 58
Contact Information 59

(This Page is Left for Blank)

Chapter1 <Introduction>

1.1 <Product Overview>

FS-97D is the Full-size single board computer with last Intel desktop technology with PICMG form factor. Based on Intel® Q35 and ICH9DO, the board integrates a new Core 2 Quad/Duo/Celeron processor 775-pin socket, DDR2 memory socket, Intel® Graphic Media Accelerator 3100 technology, Serial ATA II with RAID function for a powerful desktop system.

Intel® LGA775 processor

The Intel® Core 2 Quad/Duo processor now comes with a new form factor with 775-pin LGA package, for 800/1066/1333MHz front-side-bus, 12MB L2 cache, and for 65nm, 45nm manufacturing technology, the LGA processor without pin header on solder side can make user installing the processor on the socket easier.

Intel® Q35 and ICH9DO chipset

The Intel Q35 integrates DDR2 667/800MHz for memory, and Graphic Media Accelerator (GMA) 3100 technology for new graphic engine. It can provide up to 384MB of frame buffer when you install over 1GB of system memory. The ICH9DO integrates with up to 8 USB2.0 interfaces, and serial ATA II interface with RAID function.

Flexible Extension Interface

The board provides one mini-PCI socket.

1.2 <Product Specification>

General Specification	
Form Factor	Full-size PICMG 1.0 CPU card
CPU	Intel® **Core 2 Quad/Duo Celeron** processor with **LGA775** socket Package type: LGA 775 Front side bus: 800/1066/1333MHz Support **Intel® Hyper-Threading Technology and Quad/Dual core**
Memory	2 x 240-pin DDR2 667/800MHz SDRAM up to 4GB Unbufferred, none-ECC memory supported only
Chipset	Intel® Q35 (Northbridge) and ICH9DO (Southbridge)
BIOS	Phoenix-Award v6.00PG 8Mb SPI flash BIOS
Green Function	Power saving mode includes doze, standby and suspend modes. ACPI version 1.0 and APM version 1.2 compliant
Watchdog Timer	System reset programmable watchdog timer with 1 ~ 255sec./min. of timeout value
Real Time Clock	Intel® ICH9DO built-in RTC with lithium battery
Serial ATAII	Intel® ICH9DO integrates 6 Serial ATA II interface RAID 0, 1,5,10 Intel Matrix Storage Technology supported
Multi-I/O Port	
Chipset	Intel® 82801IO (ICH9DO) with Winbond® W83627DHG controller
Serial Port	One RS-232 and one RS232/422/485 serial ports
USB Port	Eight Hi-Speed USB 2.0 ports with 480Mbps of transfer rate
Parallel Port	One internal bi-direction parallel port with SPP/ECP/EPP mode
Floppy Port	One internal Floppy port
IrDA Port	One IrDA compliant Infrared interface supports SIR
K/B & Mouse	External PS/2 keyboard and mouse port on bracket
GPIO	One 12-pin Digital I/O connector with 8-bit programmable I/O interface
Smart Fan	One CPU fan connector for fan speed controllable
VGA Display Interface	
Chipset	Intel® Q35 GMA3100 (Graphic Memory Controller Hub)
Frame Buffer	Up to 384MB shared with system memory
Display Type	CRT, LCD monitor with analog display Onboard 18/24-bit dual channel LVDS interface (FS-97DXG/ XG2 Only) Onboard DVI interface (FS-97DDG / DG2 Only)
Connector	External DB15 female connector on bracket Onboard 40-pin LVDS connector(FS-97DXG/ XG2 Only) Onboard 26-pin DVI Connector (FS-97DDG / DG2 Only)

Ethernet Interface	
Controller	One or two Intel 82573L Gigabit Ethernet controller
Type	Triple speed 10/100/1000Base-T Auto-switching Fast Ethernet Full duplex, IEEE802.3U compliant
Connector	Two External LAN connectors with LED on bracket
Audio Interface	
Chipset	Intel® ICH9DO with Realtek ALC888 HD Audio Intel High Definition Audio compliance
Interface	2 channels sound output
Connector	Internal 10-pin header for line-in/-out, MIC-in, 4-pin header for CD-IN
Expansive Interface	
Mini PCI	One Mini-PCI socket **TYPE III A** (32-bit, 33MHz) Power supply: +3.3V, +5V, 3VSB
Power and Environment	
Power Requirement	+5V, +12 DC input & $5V_{SB}$ Requirement
Dimension	338 (L) x 122 (H) mm
Temperature	Operating within 0 ~ 60℃ (32 ~ 140℉) Storage within -20 ~ 85℃ (-4 ~ 185℉)
Ordering Code	
FS-97DDG	Onboard VGA, Mini-PCI, 6 x SATA, HD Audio, 1 X IrDA 8 x USB, Serial port, LPT, GPIO, FDD, **DVI, Gigabit LAN**
FS-97DXG	Onboard VGA, Mini-PCI, 6 x SATA, HD Audio, 1 X IrDA, 8 x USB, Serial port, LPT, GPIO, FDD, **LVDS, Gigabit LAN**
FS-97DDG2	Onboard VGA, Mini-PCI, 6 x SATA, HD Audio, 1 X IrDA,, 8 x USB, 2 x Serial port, LPT, GPIO, FDD **DVI, 2 x Gigabit LAN**
FS-97DXG2	Onboard VGA,, Mini-PCI, 6 x SATA, HD Audio, 1 X IrDA, , 8 x USB, 2 x Serial port, LPT, GPIO, FDD, **LVDS , 2 x Gigabit LAN**

The specifications may be different as the actual production.
For further product information please visit the website at http://www.commell.com.tw

1.3 <Block Diagram>

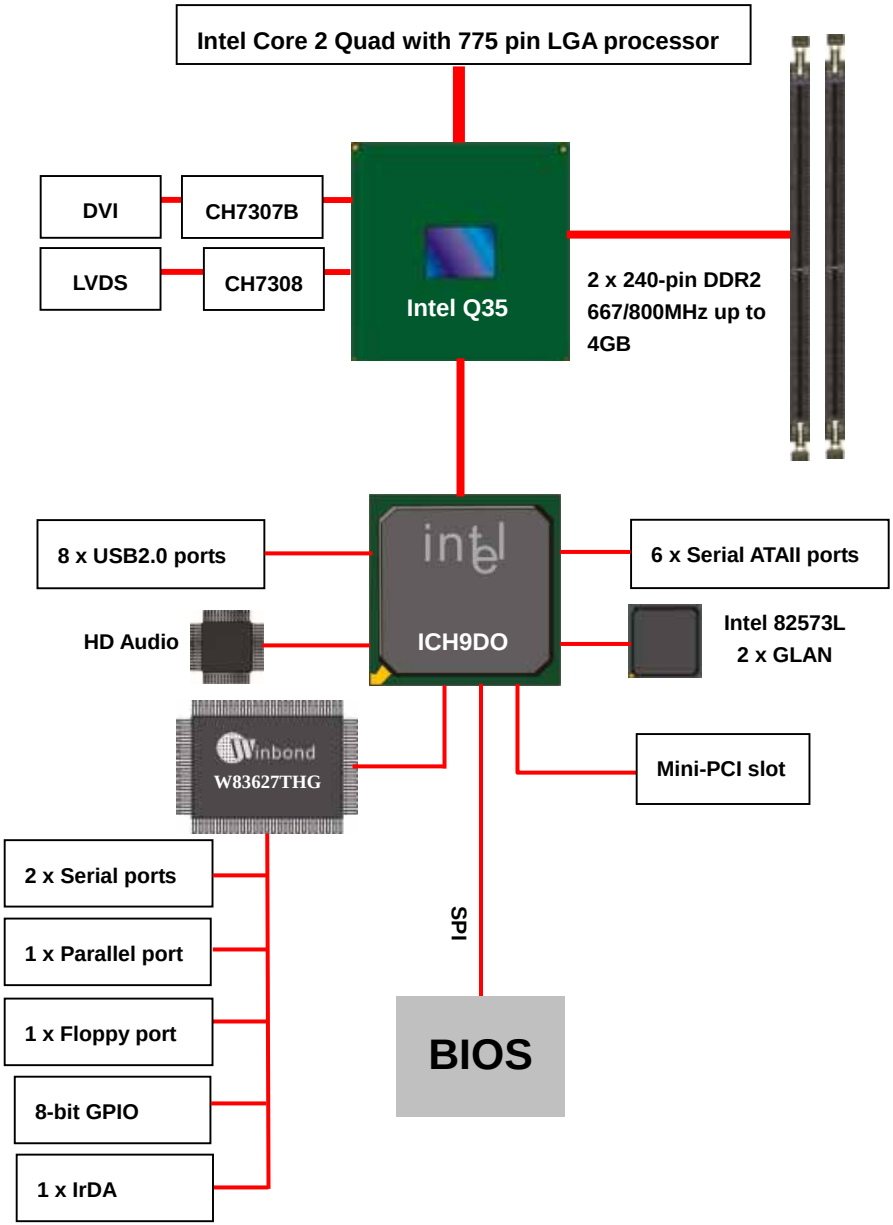

1.4 <Mechanical Drawing >

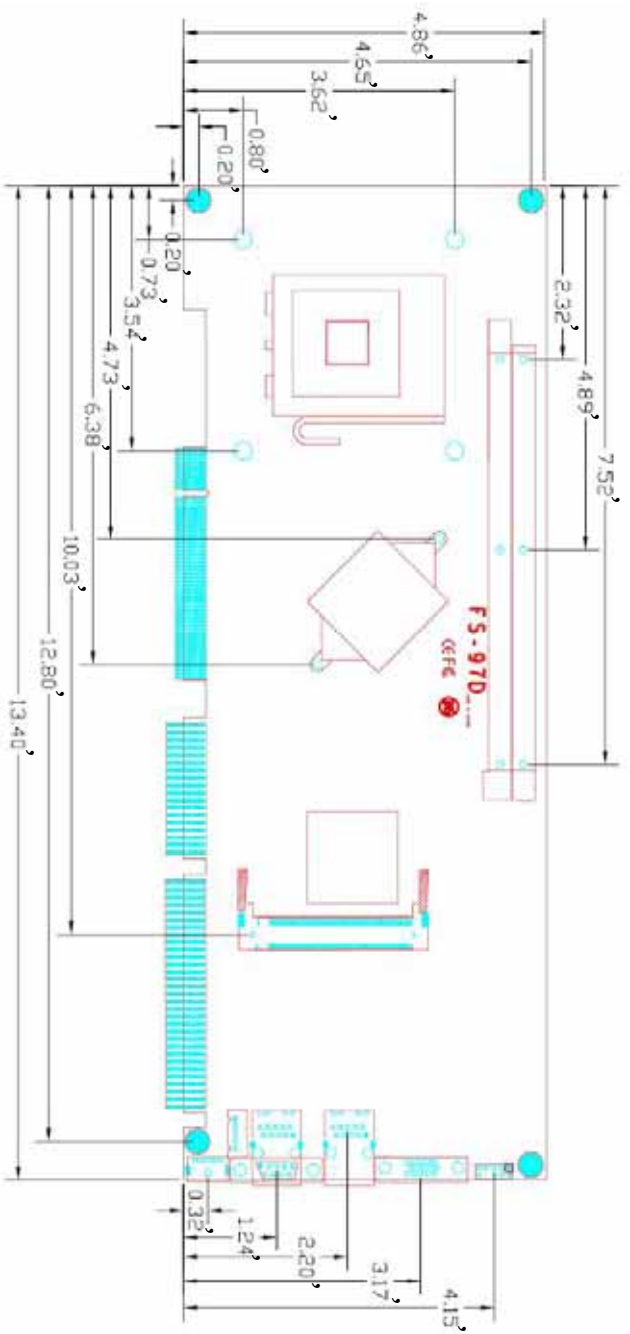

Chapter 2 <Hardware Setup>

2.1 <Connector Location>

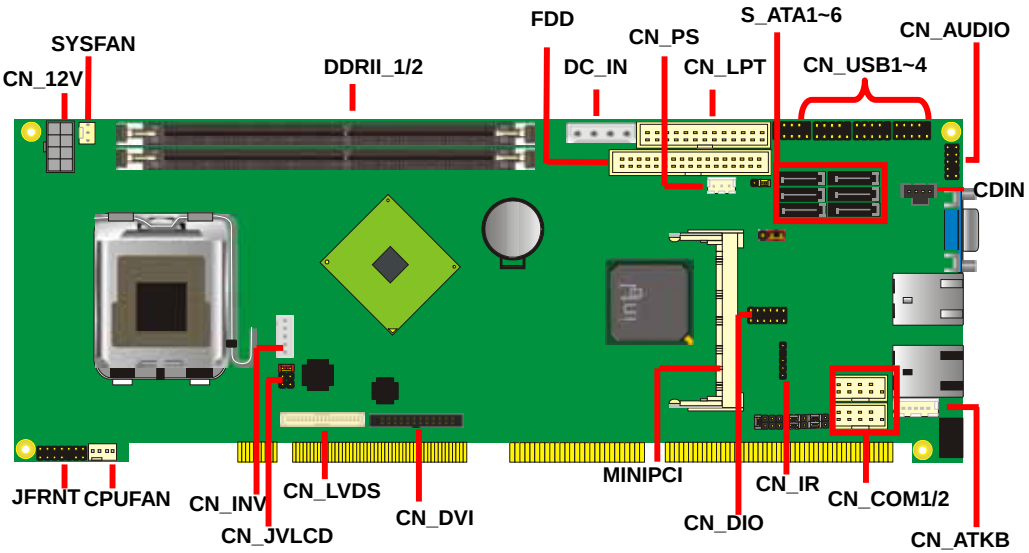

FS-97DXG2 / FS-97DDG2 / FS-97DD2G2

FS-97DXG / FS-97DDG

2.2 <Jumper Reference>

Jumper	Function
JAT	Power mode select
JRTC	CMOS Operating/Clear Setting
JVLCD	Panel Voltage Setting (FS-97BXG & XG2 Only)
JCSEL1	COM2 Function select
JCSEL2	RS232/422/485

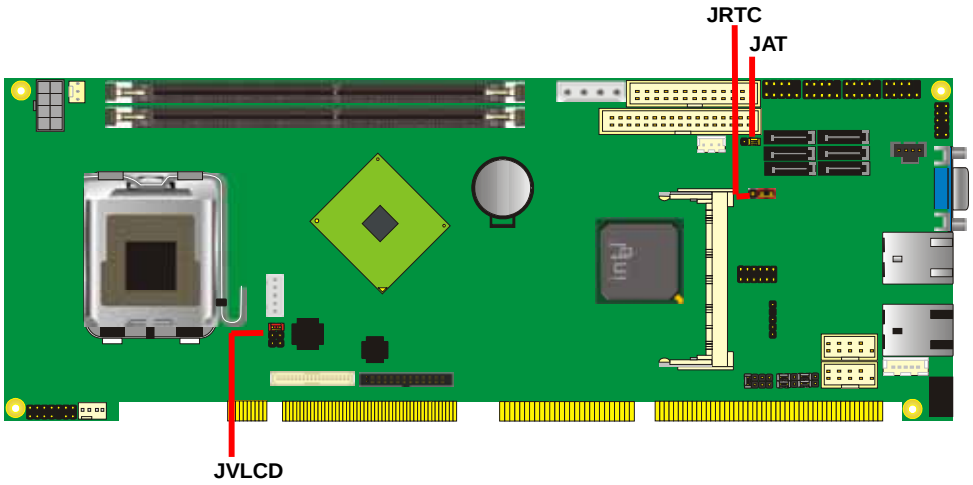

2.3 <Connector Reference>

2.3.1 <Internal Connectors>

Connector	Function	Remark
CPU	LGA775 CPU socket	
DDRII1/2	240 -pin DDR2 SDRAM DIMM socket	
FDD	34-pin floppy connector	
CN_LPT	13 x 2-pin LPT connector	
S_ATAI1/2/3/4/5/6	7-pin Serial ATA II connector	
CN_12V	8-pin +12V additional power supply connector	
CN_AUDIO	5 x 2-pin audio connector	
CDIN	4-pin CD-ROM audio input connector	
CN_PS	3-pin ATX function connector	
DC_IN	4-pin power supply connector	
CN_DIO	6 x 2-pin digital I/O connector	
CN_USB1/2/3/4	10-pin USB connector	
CPUFAN	4-pin CPU cooler fan connector	
SYSFAN	3-pin system cooler fan connector	
CN_IR	5-pin IrDA connector	
CN_ATKB	5-pin AT keyboard connector	
CN_INV	5-pin LCD inverter connector	FS-97DXG
CN_LVDS	20 x 2-pin LVDS connector	FS-97DXG
JFRNT	14-pin front panel switch/indicator connector	
Mini-PCI	1 x 124-pin Mini-PCI socket	
CN_DVI	26-Pin connector	FS-97DDG
CN_COM1/2	5 x 2-pin com connector	

2.3.2 <External Connectors>

Connector	Function	Remark
CRT	VGA connector	
RJ45_1/2	One/Two RJ45 LAN connector	
PS2	PS/2 keyboard and mouse connector	

2.4 <CPU and Memory Setup>

2.4.1 <CPU installation>

FS-97D has a LGA775 CPU socket onboard; please check following steps to install the processor properly.

Attention ***If FS-97D need RMA please Keep CPU socket cover on the CPU Socket.***

Warning ***If CPU Socket internal Pin damage We could not provide warranty.***

Intel® Core 2 Quad/Duo processor
Package type: 775 pin LGA
L2 Cache: 12MB
FSB: 800/1066/1333MHz (333MHz x 4)
Manufacturing: 65nm, 90nm
Intel Hyper Threading Technology and Core 2 Quad/Duo supported

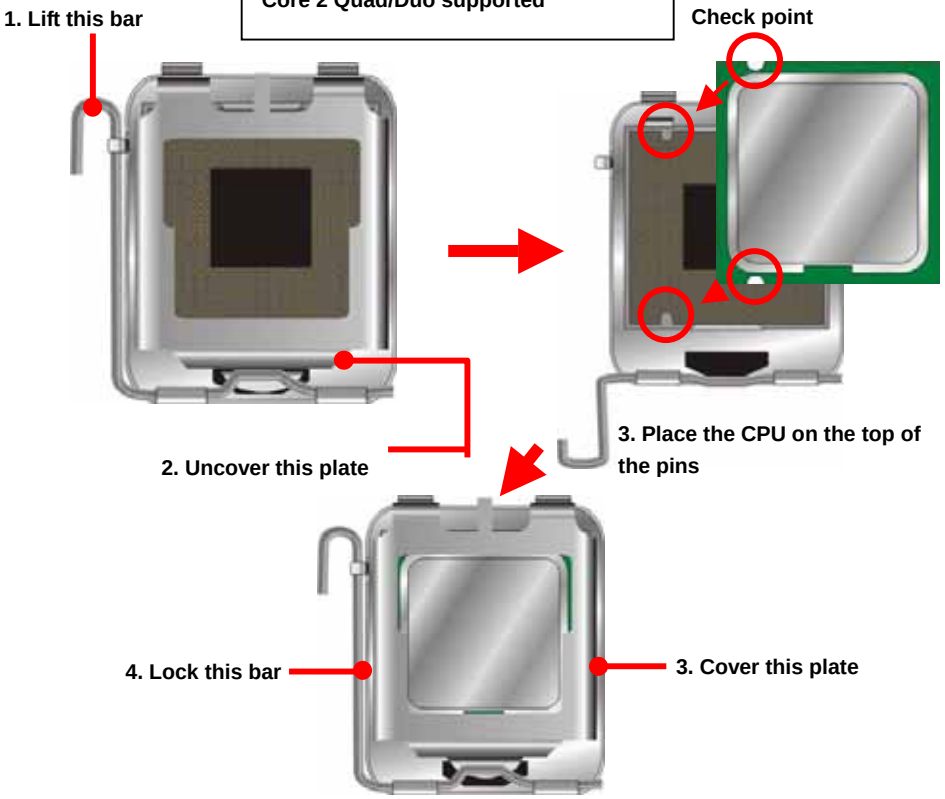

Notice: Please place the CPU on the pins tenderly to avoid bending the pins

2.4.2 <Memory installation>

FS-97D has two 240-pin DDR2 DIMM support up to 4GB of memory capacity. The memory frequency supports 667/800MHz . Only Non-ECC memory is supported.

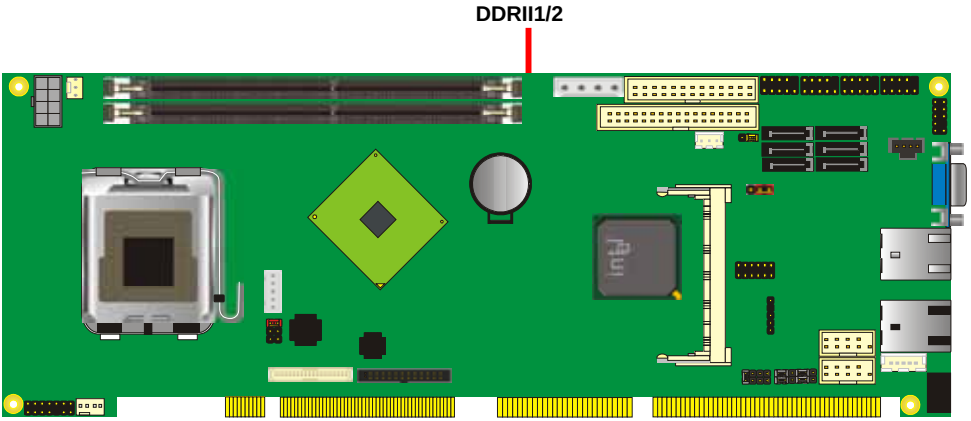

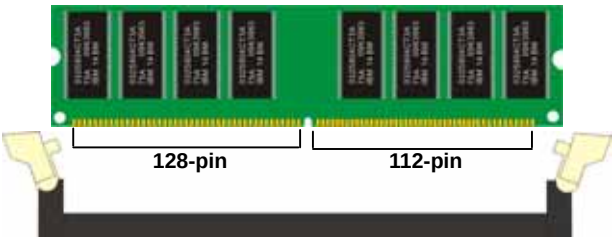

Please check the pin number to match the socket side well before installing memory module.

2.5 <CMOS Setup>

The board's data of CMOS can be setting in BIOS. If the board refuses to boot due to inappropriate CMOS settings, here is how to proceed to clear (reset) the CMOS to its default values.

Jumper: JRTC

Type: Onboard 3-pin jumper

JRTC	Mode
1-2	Clear CMOS
2-3	Normal Operation

Default setting 2-3

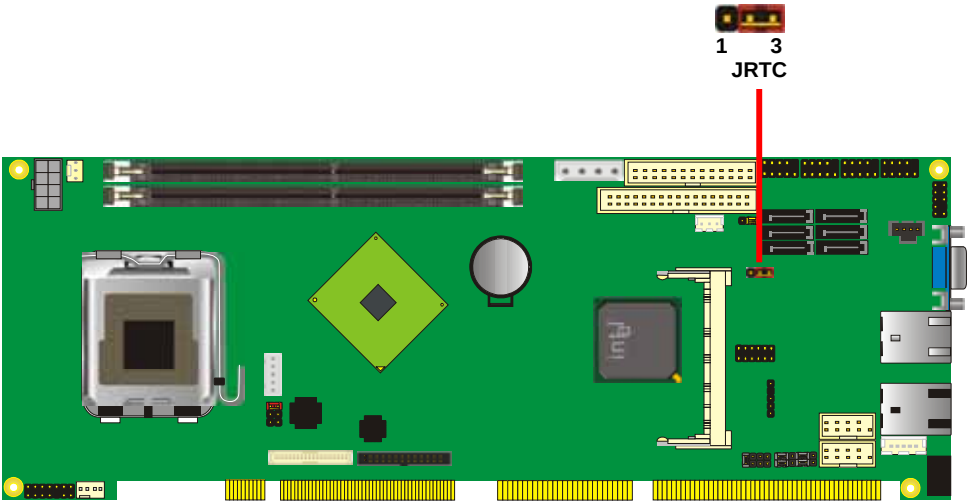

2.6 <Serial ATA installation>

FS-97D has six Serial ATA II interfaces with RAID function, the transfer rate of the Serial ATA II can be up to 300MB/s. Please go to http://www.serialata.org/ for more about Serial ATA technology information. Based on Intel® ICH9DO, it supports **Intel® Matrix Storage Technology** with combination of RAID 0,1,5 and 10. The main features of RAID on ICH9DO are listed below:

1. Supports for up to RAID volumes on a single, two-hard drive RAID array.
2. Supports for two, two-hard drive RAID arrays on any of six Serial ATA ports.
3. Supports for Serial ATA ATAPI devices.
4. Supports for RAID spares and automatic rebuild.
5. Supports on RAID arrays, including NCQ and native hot plug.

For more information please visit Intel's official website.

For more about the system setup for Serial ATA, please check the chapter of SATA configuration.

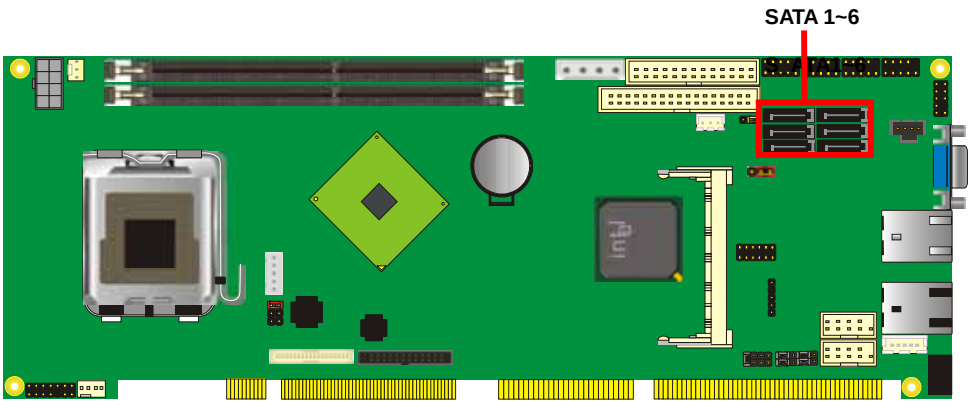

2.7 <LAN Interface>

The Intel 82573L supports triple speed of 10/100/1000Base-T, with IEEE802.3 compliance and Wake-On-LAN supported.

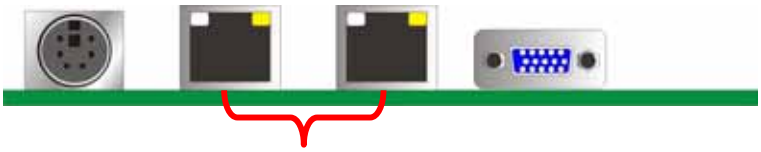

LAN1/2

LAN

2.8 <Onboard Display Interface>

Based on Intel Q35 chipset with built-in graphics, the board provides one VGA connector on real external I/O port, and one 40-pin LVDS interface with 5-pin LCD backlight inverter connector. (FS-97DXG/ XG2 Only)

The board also provides 26-pin DVI interface. (FS-97DDG/ DG2 Only)

2.8.1 <Analog Display>

Please connect your CRT or LCD monitor with VGA male connector to the onboard DB15 female connector on bracket.

2.8.2 <LVDS Display FS-97DXG&XG2 Only >

The board provides one 40-pin LVDS connector for 18/24-bit dual channel panels, supports up to 1600 x 1200 (UXGA) of resolution, with one LCD backlight inverter connector and one jumper for panel voltage setting.

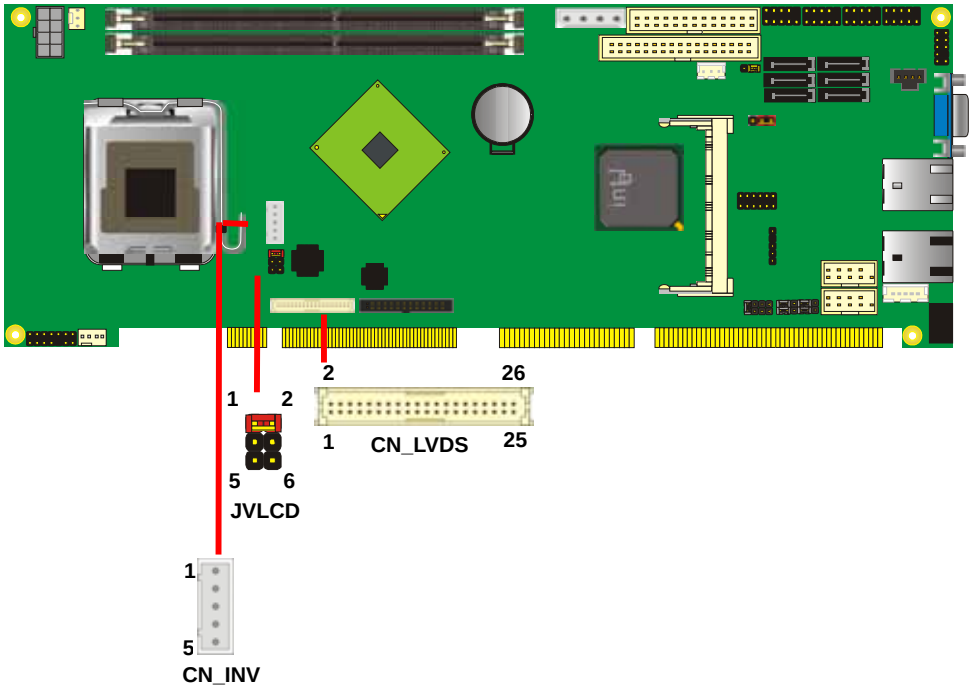

Connector: **CN_INV**

Type: 5-pin LVDS Power Header

Connector model: **JST B5B-XH-A**

Pin	Description
1	+12V
2	GND
3	GND
4	GND
5	ENABKL

Connector: **JVLCD**

Type: 6-pin Power select Header

Pin	Description
1-2	LCDVCC **(3.3V)**
3-4	LCDVCC **(5V)**
5-6	LCDVCC **(12V)**

Default setting: 1-2

Connector: **CN_LVDS**

Type: onboard 40-pin connector for LVDS connector

Connector model: **HIROSE DF13-40DP-1.25V**

Pin	Signal	Pin	Signal
2	LCDVCC	1	LCDVCC
4	GND	3	GND
6	ATX0-	5	BTX0-
8	ATX0+	7	BTX0+
10	GND	9	GND
12	ATX1-	11	BTX1-
14	ATX1+	13	BTX1+
16	GND	15	GND
18	ATX2-	17	BTX2-
20	ATX2+	19	BTX2+
22	GND	21	GND
24	ACLK-	23	BTX3-
26	ACLK+	25	BTX3+
28	GND	27	GND
30	ATX3-	29	BCLK-
32	ATX3+	31	BCLK+
34	GND	33	GND
36	N/C	35	N/C
38	N/C	37	N/C
40	N/C	39	N/C

To setup the LCD, you need the component below:

1. A panel with LVDS interfaces.
2. An inverter for panel's backlight power.
3. A LCD cable and an inverter cable.

For the cables, please follow the pin assignment of the connector to make a cable, because every panel has its own pin assignment, so we do not provide a standard cable; please find a local cable manufacture to make cables.

LCD Installation Guide:

1. Preparing the **FS-97D**, **LCD panel** and the **backlight inverter**.

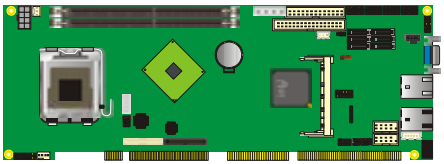

2. Please check the datasheet of the panel to see the voltage of the panel, and set the jumper **JVLCD** to +5V or +3.3V.
3. You would need a LVDS type cable.

4. To connect all of the devices well.

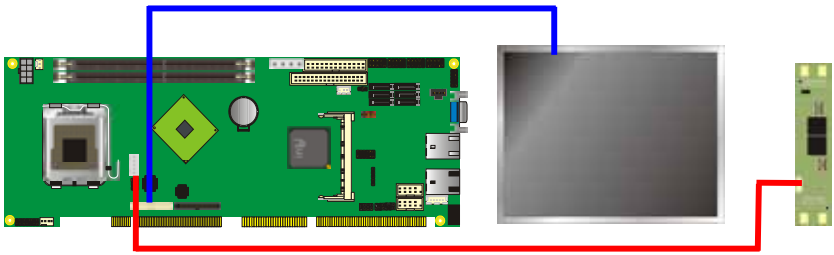

After setup the devices well, you need to select the LCD panel type in the BIOS.

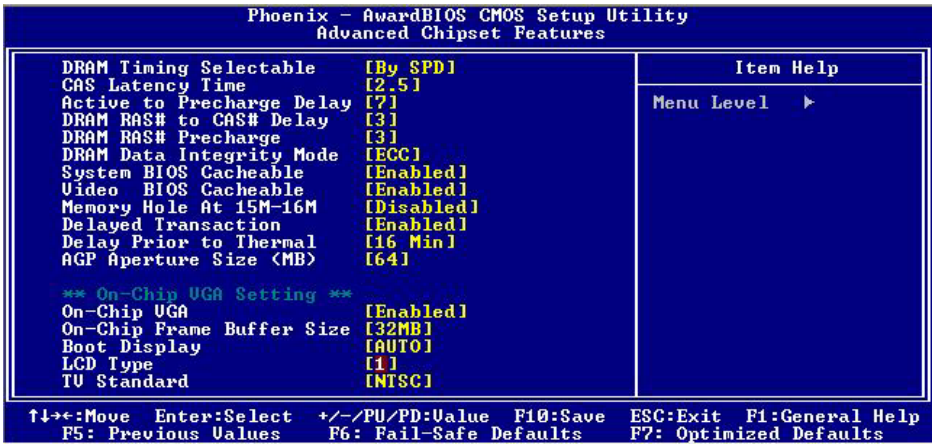
Phoenix - AwardBIOS CMOS Setup Utility
Advanced Chipset Features
DRAM Timing Selectable [By SPD]
CAS Latency Time [2.5]
Active to Precharge Delay [7]
DRAM RAS# to CAS# Delay [3]
DRAM RAS# Precharge [3]
DRAM Data Integrity Mode [ECC]
System BIOS Cacheable [Enabled]
Video BIOS Cacheable [Enabled]
Memory Hole At 15M-16M [Disabled]
Delayed Transaction [Enabled]
Delay Prior to Thermal [16 Min]
AGP Aperture Size (MB) [64]
** On-Chip VGA Setting **
On-Chip VGA [Enabled]
On-Chip Frame Buffer Size [32MB]
Boot Display [AUTO]
LCD Type [1]
TV Standard [NTSC]
Item Help
Menu Level ▶
↑↓→←:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help
F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults

The LCD type mapping is list below:

BIOS panel type selection form			
Single channel		Dual channel	
NO.	Output format	NO.	Output format
1	800 x 600 (18bit)	3	1280 x 1024 (24bit)
2	1024 x 768 (24bit)	4	1366 x 768 (24bit)

2.8.3 <DVI Display FS-97DDG/ DG2 Only >

The board provides optional DVI-D interface with Intel Q35, compliant with DVI 1.0 standard.

Connector: **CN_DVI**

Connector type: 26-pin header connector (pitch = 2.0mm)

Pin Number	Assignment	Pin Number	Assignment
1	TX1+	2	TX1-
3	Ground	4	Ground
5	TXC+	6	TXC-
7	Ground	8	PVDD
9	N/C	10	N/C
11	TX2+	12	TX2-
13	Ground	14	Ground
15	TX0+	16	TX0-
17	N/C	18	HPDET
19	DDCDATA	20	DDCCLK
21	GND	22	N/C
23	N/C	24	N/C
25	N/C	26	N/C

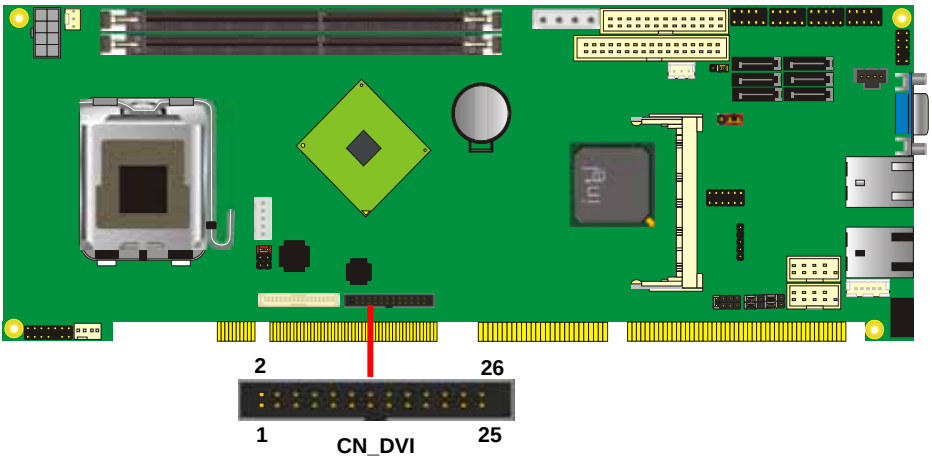

2.9 <Audio Installation>

The board integrates onboard audio interface with REALTEK ALC888 codec, with Intel next generation of audio standard as High Definition Audio, it offers more vivid sound and other advantages than former HD audio compliance.

The main specifications of ALC888 are:

- **High-performance DACs with 100dB S/N ratio**
- **Compatible with HD**
- **Meets Microsoft WHQL/WLP 2.0 audio requirements**

The board provides amplified speaker out and Line-in/MIC-in ports for front I/O panel through audio cable.

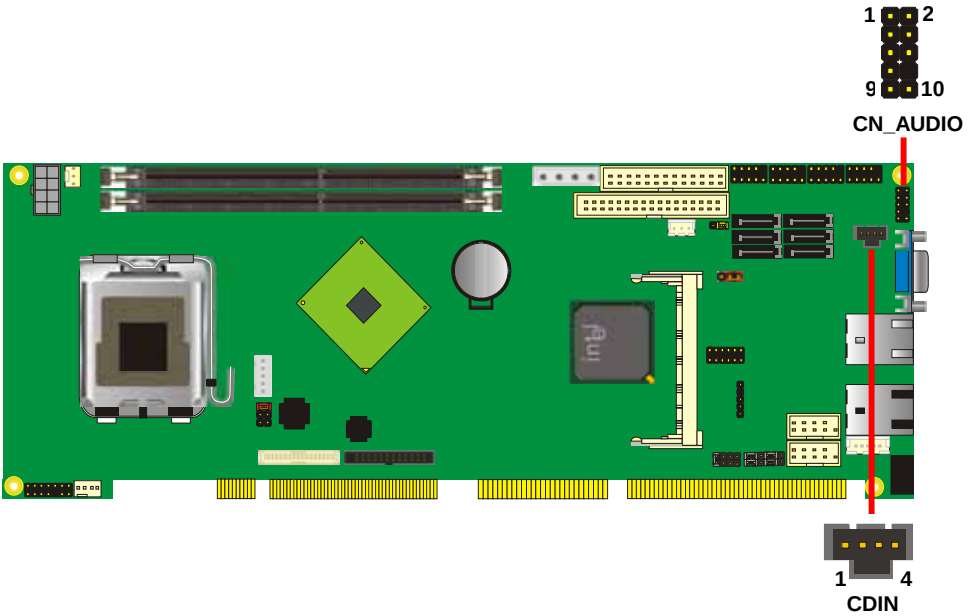

Connector: CN_AUDIO

Type: 10-pin (2 x 5) header (pitch = 2.54mm)

Pin	Description	Pin	Description
1	MIC_L	2	Ground
3	MIC_R	4	ACZ_DET
5	Speaker_R	6	MIC Detect
7	SENSE	8	N/C
9	Speaker_L	10	Speaker Detect

Connector: CDIN

Type: 4-pin header (pitch = 2.54mm)

Pin	Description
1	CD – Left
2	Ground
3	Ground
4	CD – Right

2.11 <GPIO interface>

The board provides a programmable 8-bit digital I/O interface for control panel application.

Connector: **CN_DIO**
Type: onboard 2 x 6-pin header, pitch=2.0mm

Pin	Description	Pin	Description
1	Ground	2	Ground
3	GP10	4	GP14
5	GP11	6	GP15
7	GP12	8	GP16
9	GP13	10	GP17
11	VCC	12	+12V

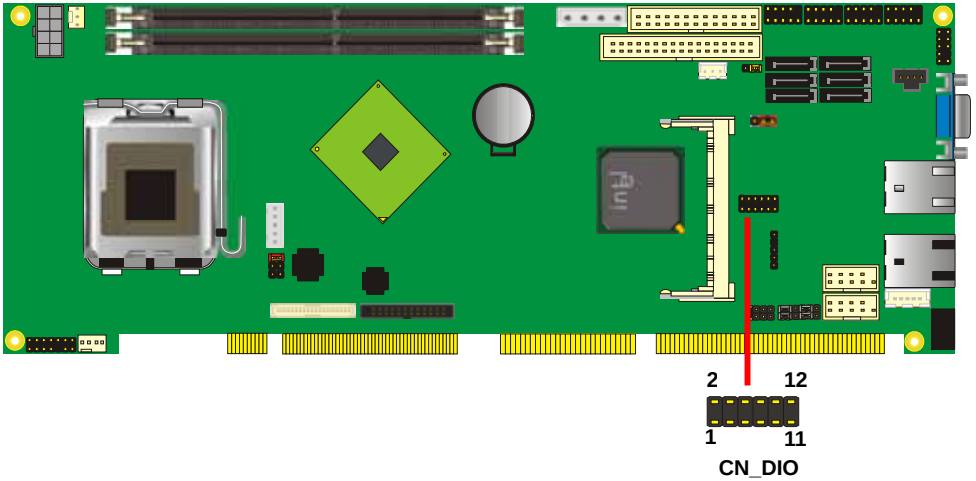

2.12 <USB2.0 Interface>

Based on Intel ICH9DO, the board provides 8 USB2.0 ports. The USB2.0 interface provides up to 480Mbps of transferring rate.

The Intel® ICH9DO contains two Enhanced Host Controller Interface (EHCI) and six Universal Host Controller Interfaces (UHCI), it can determine whether your connected device is for USB1.1 or USB2.0, and change the transfer rate automatically.

Connector: **CN_USB1/2/3/4**
Type: 10-pin (5 x 2) header for USB1/2/3/4 Ports

Pin	Description	Pin	Description
1	VCC	2	VCC
3	Data0-	4	Data1-
5	Data0+	6	Data1+
7	Ground	8	Ground
9	Ground	10	N/C

CN_USB1/2/3/4

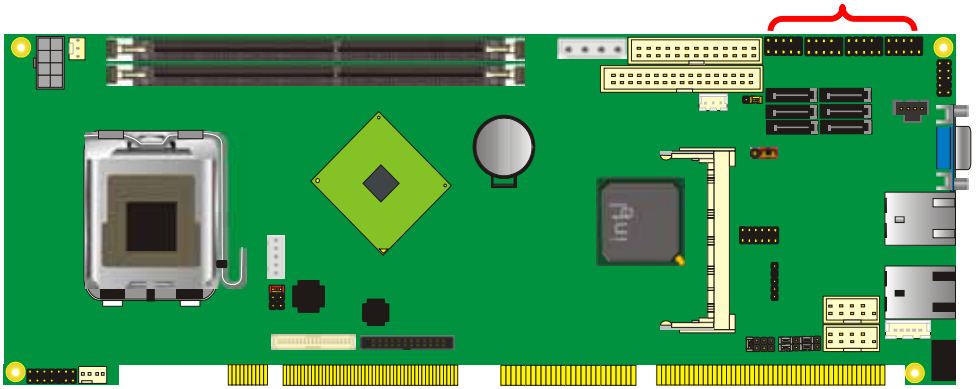

2.13 <Power and Fan Installation>

The **FS-97D** provides a standard ATX power supply with **4-pin** ATX connector and **8-pin** additional 12V connector, and the board provides one **4-pin** fan connector supporting smart fan for CPU cooler and one 3-pin cooler fan connectors for system and Northbridge chip. The 8-pin CN_12V additional power connector is necessary for CPU powering; please connect this well before you finishing the system setup.

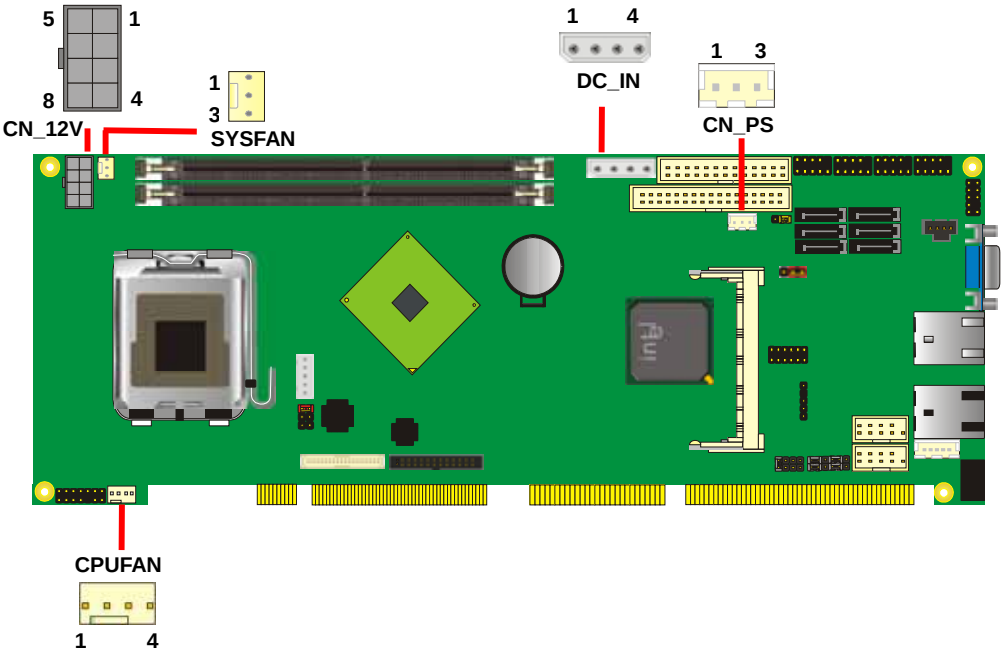

Connector: **CN_12V**

Type: 8-pin ATX power connector

PIN assignment			
1	GND	5	+12V
2	GND	6	+12V
3	GND	7	+12V
4	GND	8	+12V

Connector: **DC_IN**

Type: 4-pin P-type connector for +5V/+12V input

Pin	Description	Pin	Description	Pin	Description	Pin	Description
1	+12V	2	Ground	3	Ground	4	+5V

Connector: **CN_PS**

Type: 3-pin ATX function connector

Pin	Description	Pin	Description	Pin	Description
1	5V Standby	2	Ground	3	Power On

Connector: **CPUFAN**

Type: 4-pin fan wafer connector

Pin	Description	Pin	Description
1	Ground	2	+12V
3	Fan Speed Detection	4	Fan Control

Connector: **SYSFAN**

Type: 3-pin fan wafer connector

Pin	Description	Pin	Description	Pin	Description
1	Ground	2	+12V	3	Sense

2.14 <Serial Port>

The board supports one RS232 serial port and one jumper selectable RS232/422/485 serial ports. The jumper JCSEL1 & JCSEL2 can let you configure the communicating modes for COM2.

Connector: **CN_COM1/2**
Type: 10-pin (5 x 2) 2.54mm x 2.54mm-pitch header for COM2



Pin	Description	Pin	Description
1	DCD/422TX-/485-	2	RXD/422TX+/485+
3	TXD/422RX+	4	DTR/422RX-
5	GND	6	DSR
7	RTS	8	CTS
9	RI	10	N/C

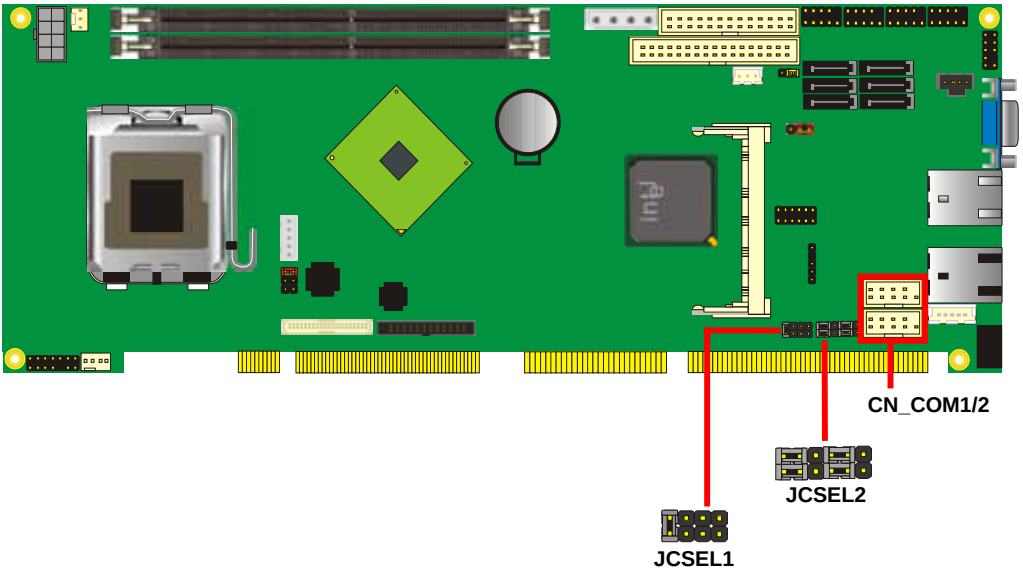

Function	JCSEL1	JCSEL2
SIR		
RS-422		
RS-485		
RS-232		

2.15 <Switch and Indicator>

The **JFRNT** provides front control panel of the board, such as power button, reset and beeper, etc. Please check well before you connecting the cables on the chassis.

Connector: **JFRNT**
Type: onboard 14-pin (2 x 7) 2.54-pitch header

Function	Signal	PIN		Signal	Function
IDE LED	HDLED+	1	2	PWDLED+	Power LED
	HDLED-	3	4	N/C	
Reset	Reset+	5	6	PWDLED-	
	Reset-	7	8	SPKIN+	Speaker
	N/C	9	10	N/C	
Power Button	PWRBT+	11	12	N/C	
	PWRBT-	13	14	SPKIN-	

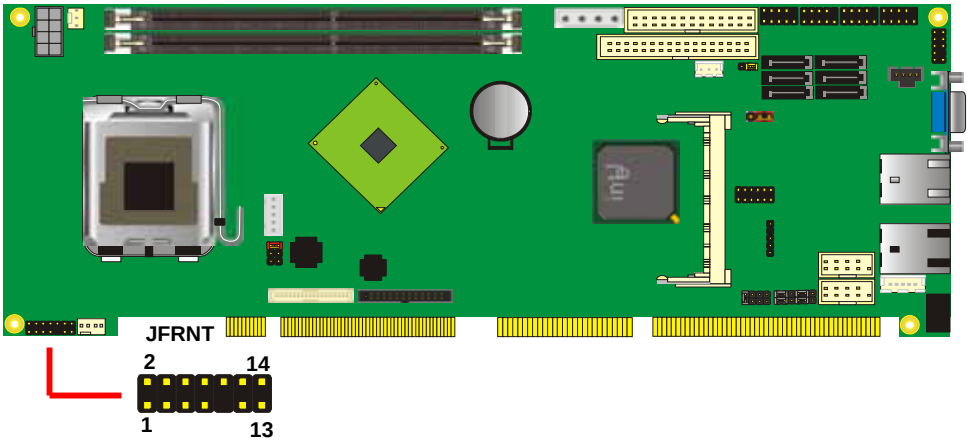

(This Page is Left for Blank)

Chapter 3 <System Configuration>

3.1 <SATA configuration>

SATA Mode:

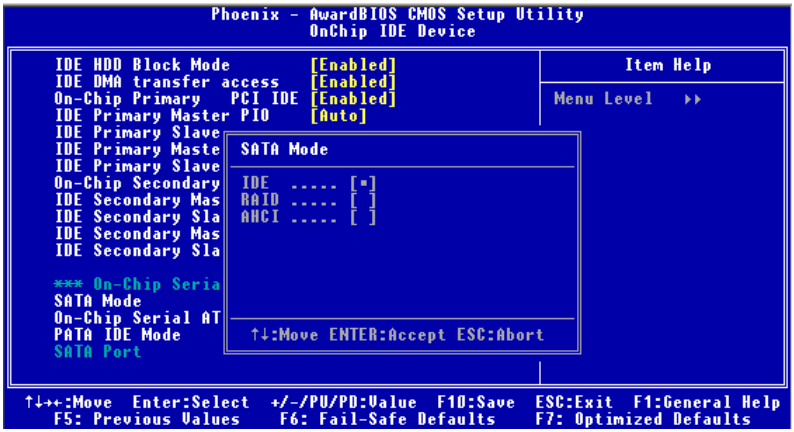

This option can let you select whether the Serial ATA hard drives would work under normal IDE mode or RAID mode. The RAID mode need more than one HDD is applied.

3.2 <SATA RAID Configuration>

The board integrates Intel® ICH9DO with RAID function for Serial ATA II drives, and supports the configurations below:

RAID 0 (Stripping): Two hard drives operating as one drive for optimized data R/W performance. It needs two unused drives to build this operation.

RAID 1 (Mirroring): Copies the data from first drive to second drive for data security, and if one drive fails, the system would access the applications to the workable drive. It needs two unused drives or one used and one unused drive to build this operation. The second drive must be the same or lager size than first one.

RAID 5 (striping with parity)

A RAID 5 array contains three or more hard drives where the data is divided into manageable blocks called strips. Parity is a mathematical method for recreating data that was lost from a single drive, which increases fault-tolerance. The data and parity are striped across all the hard drives in the array. The parity is striped in a rotating sequence to reduce bottlenecks associated with the parity calculations.

RAID 10 (RAID 0+1)

A RAID 10 array uses four hard drives to create a combination of RAID levels 0 and 1. The data is striped across a two-drive array forming the RAID 0 component. Each of the drives in the RAID 0 array is then mirrored by a RAID 1 component.

Intel Matrix Storage Technology: This technology would allow you to use **RAID 0+1** mode on only two drives (4 drives needed on traditional RAID 0+1). It will create two partitions on each hard drive to simulate **RAID 0** and **RAID 1**. It also can let you modify the partition size without re-formatted.

For more information of Intel Matrix Storage Technology, please visit Intel's website.

If you need to install an operation system on the RAID set, please use the driver disk attached in the package when it informs you to obtain the RAID drivers.

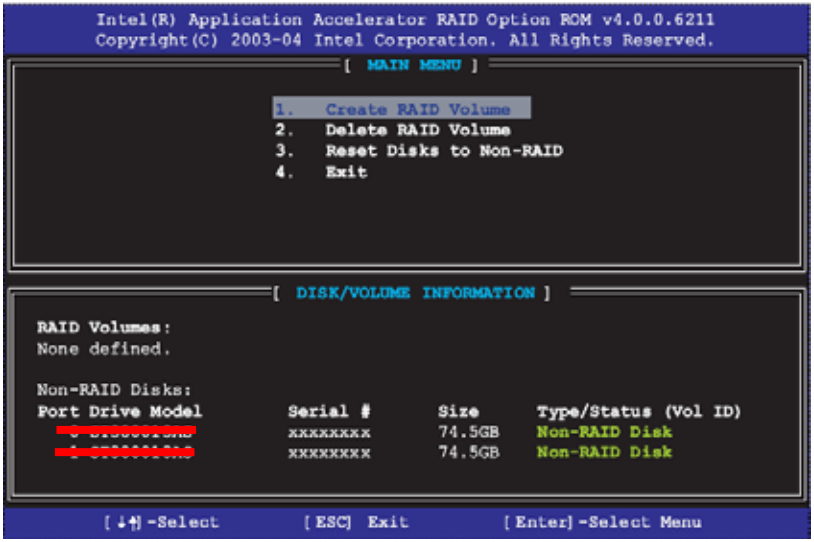
Intel(R) Application Accelerator RAID Option ROM v4.0.0.6211
Copyright(C) 2003-04 Intel Corporation. All Rights Reserved.
[MAIN MENU]
1. Create RAID Volume
2. Delete RAID Volume
3. Reset Disks to Non-RAID
4. Exit
[DISK/VOLUME INFORMATION]
RAID Volumes:
None defined.
Non-RAID Disks:
Port Drive Model Serial # Size Type/Status (Vol ID)
xxxxxxxx 74.5GB Non-RAID Disk
xxxxxxxx 74.5GB Non-RAID Disk
[↓↑] -Select [ESC] Exit [Enter] -Select Menu

Please press **<CTRL+I>** to enter the RAID configuration menu.

You can setup the RAID under operation system for Microsoft® Windows XP SP1 or Windows 2000 SP4 version, please install the Intel® Application Accelerator Ver.4.5 later to support RAID configuration with Intel® Matrix Storage Technology.

1. After installing Intel Application Accelerator, please execute Intel® Storage Utility.

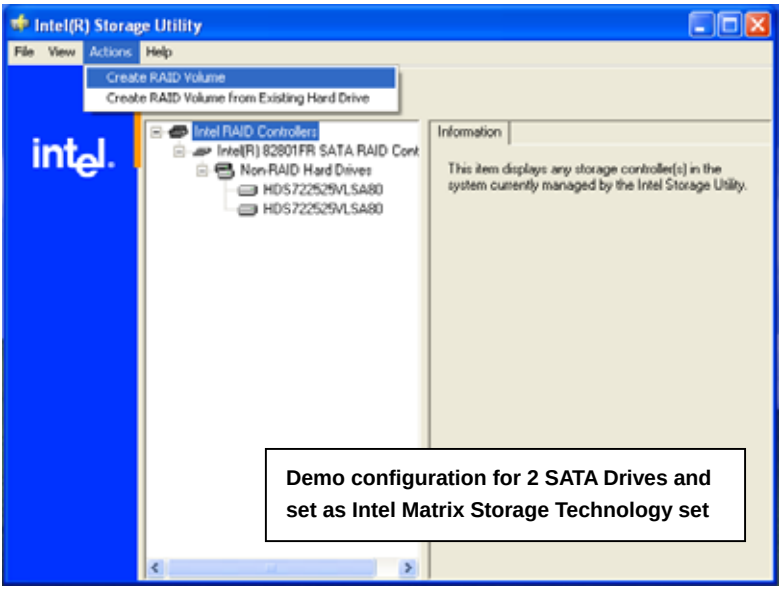
Intel(R) Storage Utility
File View Actions Help
Create RAID Volume
Create RAID Volume from Existing Hard Drive
intel.
Intel RAID Controllers
Intel(R) 82801FR SATA RAID Cont
Non-RAID Hard Drives
HDS722525VLSA80
HDS722525VLSA80
Information
This item displays any storage controller(s) in the system currently managed by the Intel Storage Utility.
Demo configuration for 2 SATA Drives and set as Intel Matrix Storage Technology set

2. Select Actions to Create RAID Volume

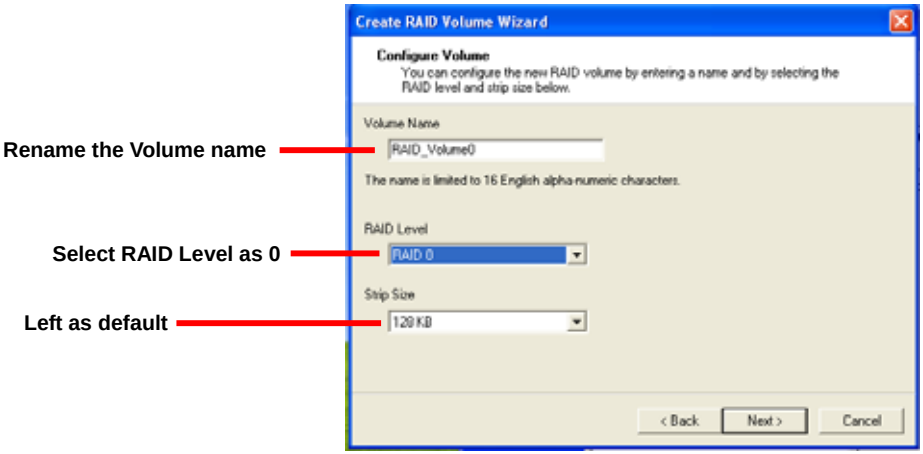
Rename the Volume name
Select RAID Level as 0
Left as default
Create RAID Volume Wizard
Configure Volume
You can configure the new RAID volume by entering a name and by selecting the RAID level and strip size below.
Volume Name
RAID_Volume0
The name is limited to 16 English alpha-numeric characters.
RAID Level
RAID 0
Strip Size
128 KB
< Back
Next >
Cancel

3. Please select two hard drives to prepare to set the RAID volume

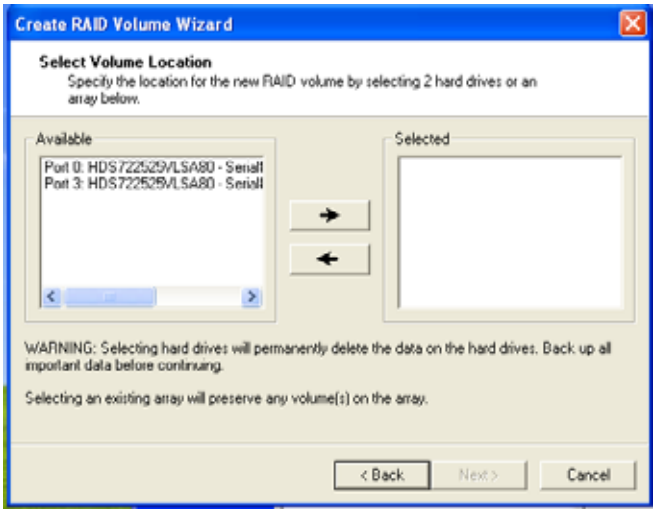
Create RAID Volume Wizard
Select Volume Location
Specify the location for the new RAID volume by selecting 2 hard drives or an array below.
Available
Port 0: HDS722525VLSA80 - Serial
Port 3: HDS722525VLSA80 - Serial
Selected
WARNING: Selecting hard drives will permanently delete the data on the hard drives. Back up all important data before continuing.
Selecting an existing array will preserve any volume(s) on the array.
< Back
Next >
Cancel

4. Specify the Volume size

Tune this bar to specify the volume size, if you specify the volume size lower than maximum, you can create a second volume for another RAID set.
(Make RAID 0+1 on only two hard drives)

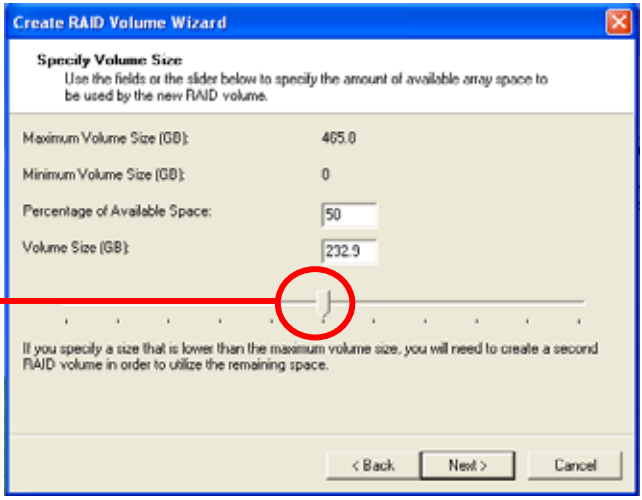
Create RAID Volume Wizard
Specify Volume Size
Use the fields or the slider below to specify the amount of available array space to be used by the new RAID volume.
Maximum Volume Size (GB): 465.8
Minimum Volume Size (GB): 0
Percentage of Available Space: 50
Volume Size (GB): 232.9
If you specify a size that is lower than the maximum volume size, you will need to create a second RAID volume in order to utilize the remaining space.
< Back
Next >
Cancel

5. Repeat the step 1 to create second volume as RAID Level 1.

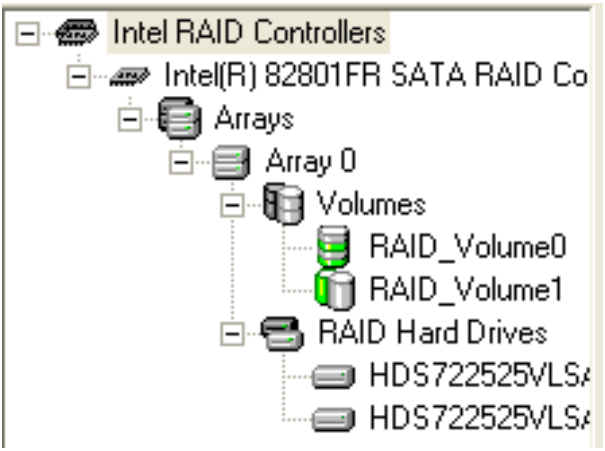

For other configuration set please click Help on tool bar.

3.3 <Audio Configuration>

The board integrates Intel® ICH9DO with REALTEK® ALC888 codec. It can support 2-channel sound under system configuration. Please follow the steps below to setup your sound system.

1. Install REALTEK HD Audio driver.
2. Lunch the control panel and Sound Effect Manager.

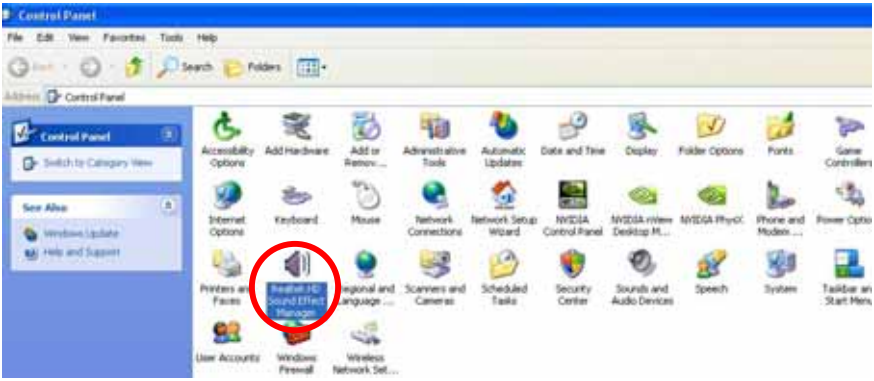

3. Select Speaker Configuration

4. Select the sound mode to meet your speaker system.

3.4 <Video Memory Setup>

Based on Intel® Q35 chipset with GMA (Graphic Media Accelerator) 3100, the board supports Intel® DVMT (Dynamic Video Memory Technology) 3.0, which would allow the video memory be triggered up to 384MB.

To support DVMT, you need to install the Intel GMA 3100 Driver with supported OS.

BIOS Setup:

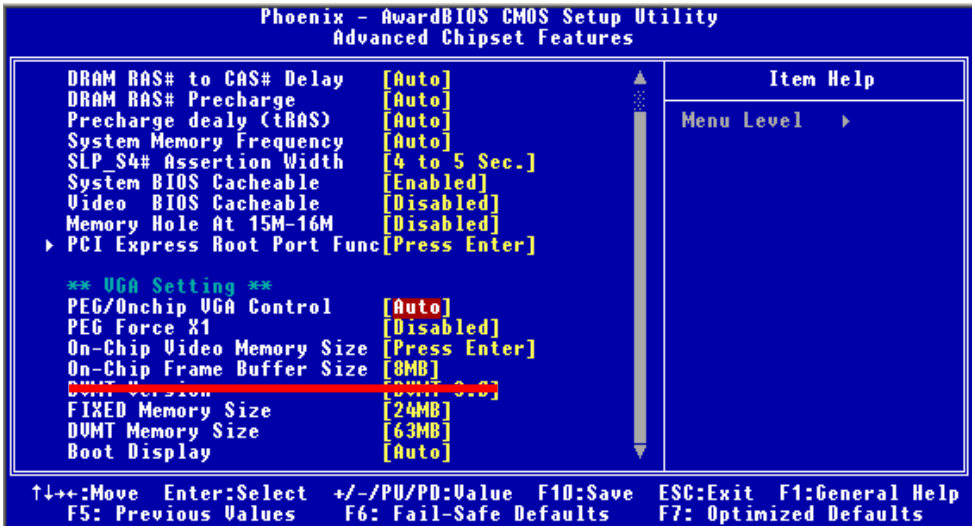
Phoenix - AwardBIOS CMOS Setup Utility
Advanced Chipset Features
DRAM RAS# to CAS# Delay [Auto]
DRAM RAS# Precharge [Auto]
Precharge dealy (tRAS) [Auto]
System Memory Frequency [Auto]
SLP_S4# Assertion Width [4 to 5 Sec.]
System BIOS Cacheable [Enabled]
Video BIOS Cacheable [Disabled]
Memory Hole At 15M-16M [Disabled]
PCI Express Root Port Func [Press Enter]
** VGA Setting **
PEG/Onchip VGA Control [Auto]
PEG Force X1 [Disabled]
On-Chip Video Memory Size [Press Enter]
On-Chip Frame Buffer Size [8MB]
FIXED Memory Size [24MB]
DVMT Memory Size [63MB]
Boot Display [Auto]
Item Help
Menu Level
↑↓→←:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help
F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults

On-Chip Video Memory Size: This option combines three items below for setup.

On-Chip Frame Buffer Size:

This item can let you select video memory which been allocated for legacy VGA and SVGA graphics support and compatibility. The available option is **1MB** and **8MB**.

Fixed Memory Size:

This item can let you select a static amount of page-locked graphics memory which will be allocated during driver initialization. Once you select the memory amount, it will be no longer available for system memory.

DVMT Memory Size:

This item can let you select a maximum size of dynamic amount usage of video memory, the system would configure the video memory depends on your application, this item is strongly recommend to be selected as **MAX DVMT**.

Fixed + DVMT Memory Size:

You can select the fixed amount and the DVMT amount at the same time for a guaranteed video memory and additional dynamic video memory, please check the table below for available setting.

System Memory	On-Chip Frame Buffer Size	Fixed Memory Size	DVMT Memory Size	Total Graphic Memory
256MB ~ 511MB	1MB	128MB	0MB	128MB
	1MB	0MB	128MB	128MB
	8MB	128MB	0MB	128MB
	8MB	0	128MB	128MB
512MB~1023MB	1MB	128MB	0	128MB
	1MB	256MB	0	256MB
	1MB	0	128MB	128MB
	1MB	0	256MB	256MB
	8MB	128MB	0	128MB
	8MB	256MB	0	256MB
	8MB	0	128MB	128MB
	8MB	0	256MB	256MB

Notice:

1. The On-Chip Frame Buffer Size would be included in the Fixed Memory.
2. Please select the memory size according to this table.

3.5 <Display Properties Setting>

Based on Intel Q35 GMCH with GMA3100 (Graphic Media Accelerator), the board supports two DACs for display device as different resolution and color bit.

Please install the Intel Graphic Driver before you starting setup display devices.

1. Click right button on the desktop to lunch **display properties**

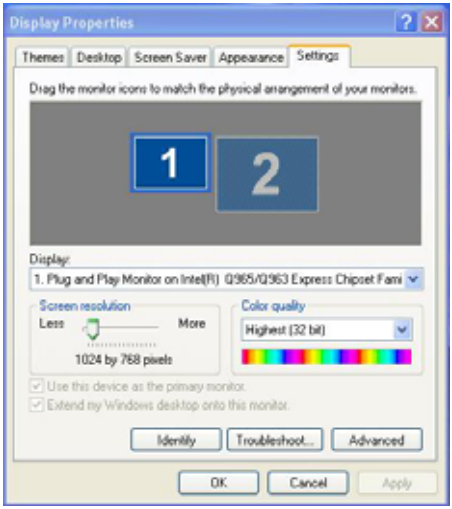

2. Click **Advanced** button for more specificity setup.

Click Graphics Properties... for advanced setup

3. This setup options can let you define each device settings.

Click Monitor to setup the CRT monitor for Colors, Resolution and Refresh Rate

Click Intel® Dual Display Clone to setup the dual display mode as same screen

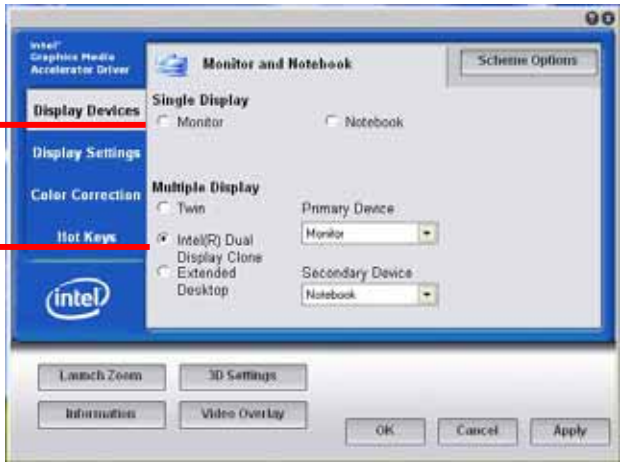

Set the main display device here

Click Extended Desktop to setup the dual display mode as different screen display

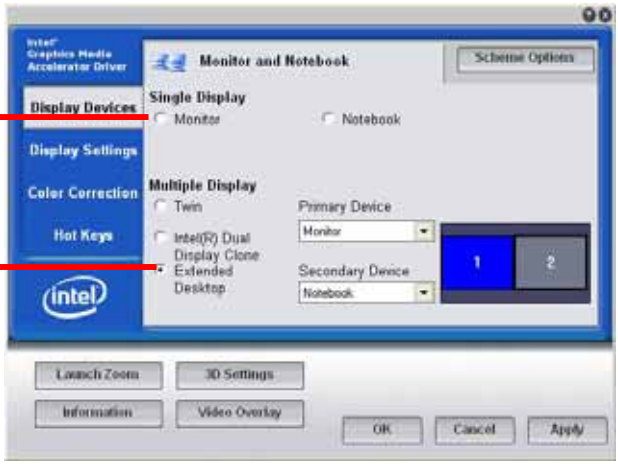

Chapter 4 <BIOS Setup>

The motherboard uses the Award BIOS for the system configuration. The Award BIOS in the single board computer is a customized version of the industrial standard BIOS for IBM PC AT-compatible computers. It supports Intel x86 and compatible CPU architecture based processors and computers. The BIOS provides critical low-level support for the system central processing, memory and I/O sub-systems.

The BIOS setup program of the single board computer let the customers modify the basic configuration setting. The settings are stored in a dedicated battery-backed memory, NVRAM, retains the information when the power is turned off. If the battery runs out of the power, then the settings of BIOS will come back to the default setting.

The BIOS section of the manual is subject to change without notice and is provided here for reference purpose only. The settings and configurations of the BIOS are current at the time of print, and therefore they may not be exactly the same as that displayed on your screen.

To activate CMOS Setup program, press ＜DEL＞ key immediately after you turn on the system. The following message "Press DEL to enter SETUP" should appear in the lower left hand corner of your screen. When you enter the CMOS Setup Utility, the Main Menu will be displayed as **Figure 4-1**. You can use arrow keys to select your function, press ＜Enter＞ key to accept the selection and enter the sub-menu.

Figure 4-1 CMOS Setup Utility Main Screen

(This Page is Left for Blank)

Appendix A <I/O Port Pin Assignment>

A.1 <Serial ATA Port>

Connector: **S_ATA1/2/3/4/5/6**

Type: 7-pin wafer connector



1	2	3	4	5	6	7
GND	RSATA_TXP1	RSATA_TXN1	GND	RSATA_RXN1	RSATA_RXP1	GND

A.2 <IrDA Port>

Connector: **CN_IR**

Type: 5-pin header for SIR Port

Pin	Description
1	Vcc
2	N/C
3	IRRX
4	Ground
5	IRTX

A.3 <VGA Port>

Connector: **CRT**

Type: 15-pin D-sub female connector on bracket



Pin	Description	Pin	Description	Pin	Description
1	RED	6	Ground	11	N/C
2	GREEN	7	Ground	12	DDC_DA
3	BLUE	8	Ground	13	HSYNC
4	N/C	9	+5V	14	VSYNC
5	Ground	10	Ground	15	DDC_CLK

A.4 <LAN Port>

Connector: **RJ451/2**
Type: RJ45 connector with LED on bracket



Pin	1	2	3	4	5
Description	TRD0+	TRD0-	TRD1+	TRD2+	TRD2-

Pin	6	7	8	9	10
Description	TRD1-	TRD3+	TRD3-	NC	NC

A.5 <Floppy Port>

Connector: **FDD**
Type: 34-pin (2x 17) 2.54-pitch box header



Pin	Description	Pin	Description
1	Ground	2	DRIVE DENSITY SELECT 0
3	Ground	4	DRIVE DENSITY SELECT 1
5	Ground	6	N/C
7	Ground	8	INDEX-
9	Ground	10	MOTOR ENABLE A-
11	Ground	12	DRIVER SELECT B-
13	Ground	14	DRIVER SELECT A-
15	Ground	16	MOTOR ENABLE B-
17	Ground	18	DIRECTION-
19	Ground	20	STEP-
21	Ground	22	WRITE DATA-
23	Ground	24	WRITE GATE-
25	Ground	26	TRACK 0-
27	Ground	28	WRITE PROTECT-
29	Ground	30	READ DATA-
31	Ground	32	HEAD SELECT-
33	Ground	34	DISK CHANGE-

A.6 <Parallel Port>

Connector: **LPT (PRINTER)**

Type: 26-pin (2 x 13) 2.54-pitch box header



Pin	Description	Pin	Description
1	STROBE-	14	AUTO FEED-
2	D0	15	ERROR-
3	D1	16	INITIALIZE-
4	D2	17	SELECT INPUT-
5	D3	18	Ground
6	D4	19	Ground
7	D5	20	Ground
8	D6	21	Ground
9	D7	22	Ground
10	ACKNOWLEDGE-	23	Ground
11	BUSY	24	Ground
12	PAPER EMPTY	25	Ground
13	SELECT+	26	N/C

Appedix B <System Resources>

B1.<I/O Port Address Map>

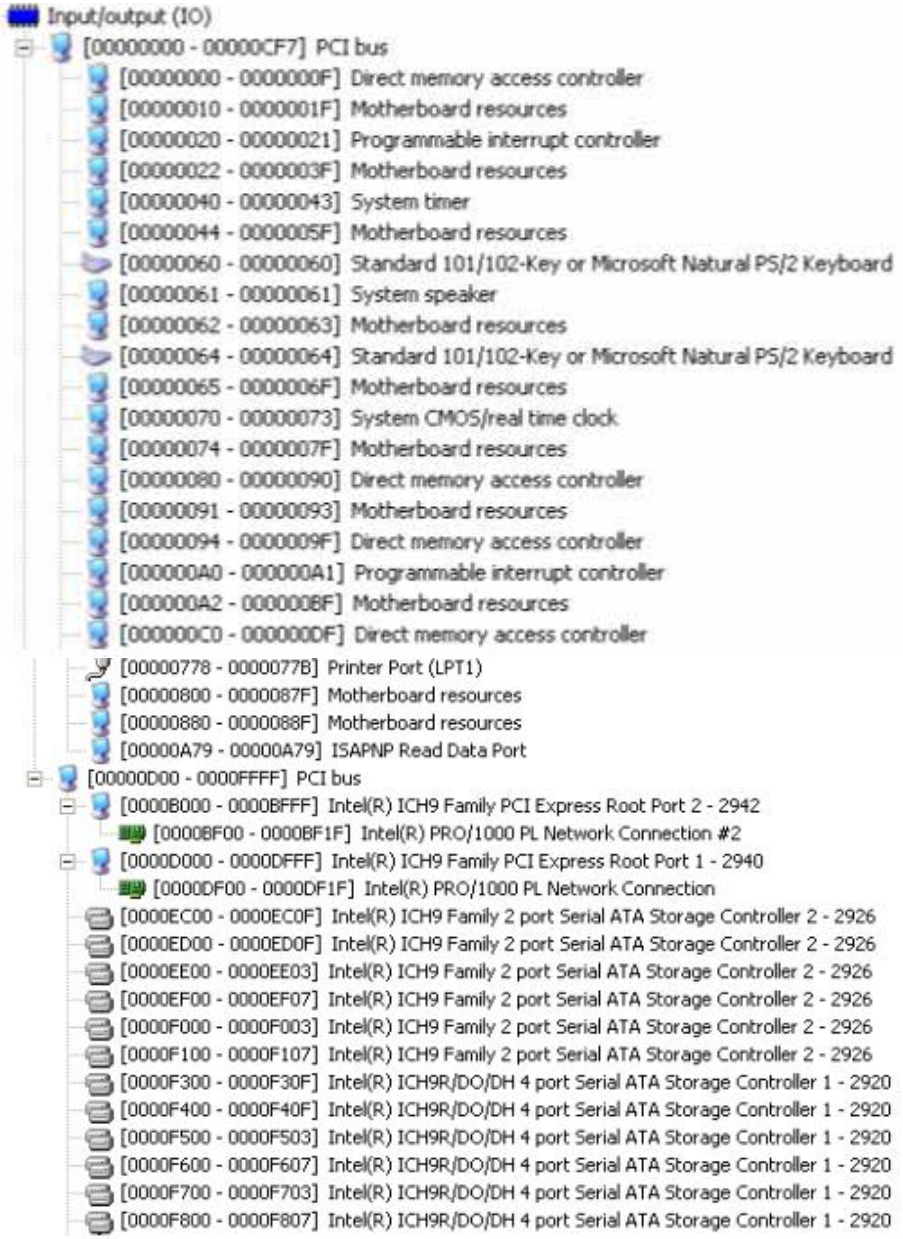
Input/output (IO)
[00000000 - 00000CF7] PCI bus
[00000000 - 0000000F] Direct memory access controller
[00000010 - 0000001F] Motherboard resources
[00000020 - 00000021] Programmable interrupt controller
[00000022 - 0000003F] Motherboard resources
[00000040 - 00000043] System timer
[00000044 - 0000005F] Motherboard resources
[00000060 - 00000060] Standard 101/102-Key or Microsoft Natural PS/2 Keyboard
[00000061 - 00000061] System speaker
[00000062 - 00000063] Motherboard resources
[00000064 - 00000064] Standard 101/102-Key or Microsoft Natural PS/2 Keyboard
[00000065 - 0000006F] Motherboard resources
[00000070 - 00000073] System CMOS/real time clock
[00000074 - 0000007F] Motherboard resources
[00000080 - 00000090] Direct memory access controller
[00000091 - 00000093] Motherboard resources
[00000094 - 0000009F] Direct memory access controller
[000000A0 - 000000A1] Programmable interrupt controller
[000000A2 - 000000BF] Motherboard resources
[000000C0 - 000000DF] Direct memory access controller
[00000778 - 0000077B] Printer Port (LPT1)
[00000800 - 0000087F] Motherboard resources
[00000880 - 0000088F] Motherboard resources
[00000A79 - 00000A79] ISAPNP Read Data Port
[00000D00 - 0000FFFF] PCI bus
[0000B000 - 0000BFFF] Intel(R) ICH9 Family PCI Express Root Port 2 - 2942
[0000BF00 - 0000BF1F] Intel(R) PRO/1000 PL Network Connection #2
[0000D000 - 0000DFFF] Intel(R) ICH9 Family PCI Express Root Port 1 - 2940
[0000DF00 - 0000DF1F] Intel(R) PRO/1000 PL Network Connection
[0000EC00 - 0000EC0F] Intel(R) ICH9 Family 2 port Serial ATA Storage Controller 2 - 2926
[0000ED00 - 0000ED0F] Intel(R) ICH9 Family 2 port Serial ATA Storage Controller 2 - 2926
[0000EE00 - 0000EE03] Intel(R) ICH9 Family 2 port Serial ATA Storage Controller 2 - 2926
[0000EF00 - 0000EF07] Intel(R) ICH9 Family 2 port Serial ATA Storage Controller 2 - 2926
[0000F000 - 0000F003] Intel(R) ICH9 Family 2 port Serial ATA Storage Controller 2 - 2926
[0000F100 - 0000F107] Intel(R) ICH9 Family 2 port Serial ATA Storage Controller 2 - 2926
[0000F300 - 0000F30F] Intel(R) ICH9R/DO/DH 4 port Serial ATA Storage Controller 1 - 2920
[0000F400 - 0000F40F] Intel(R) ICH9R/DO/DH 4 port Serial ATA Storage Controller 1 - 2920
[0000F500 - 0000F503] Intel(R) ICH9R/DO/DH 4 port Serial ATA Storage Controller 1 - 2920
[0000F600 - 0000F607] Intel(R) ICH9R/DO/DH 4 port Serial ATA Storage Controller 1 - 2920
[0000F700 - 0000F703] Intel(R) ICH9R/DO/DH 4 port Serial ATA Storage Controller 1 - 2920
[0000F800 - 0000F807] Intel(R) ICH9R/DO/DH 4 port Serial ATA Storage Controller 1 - 2920

B2.<Memory Address Map>

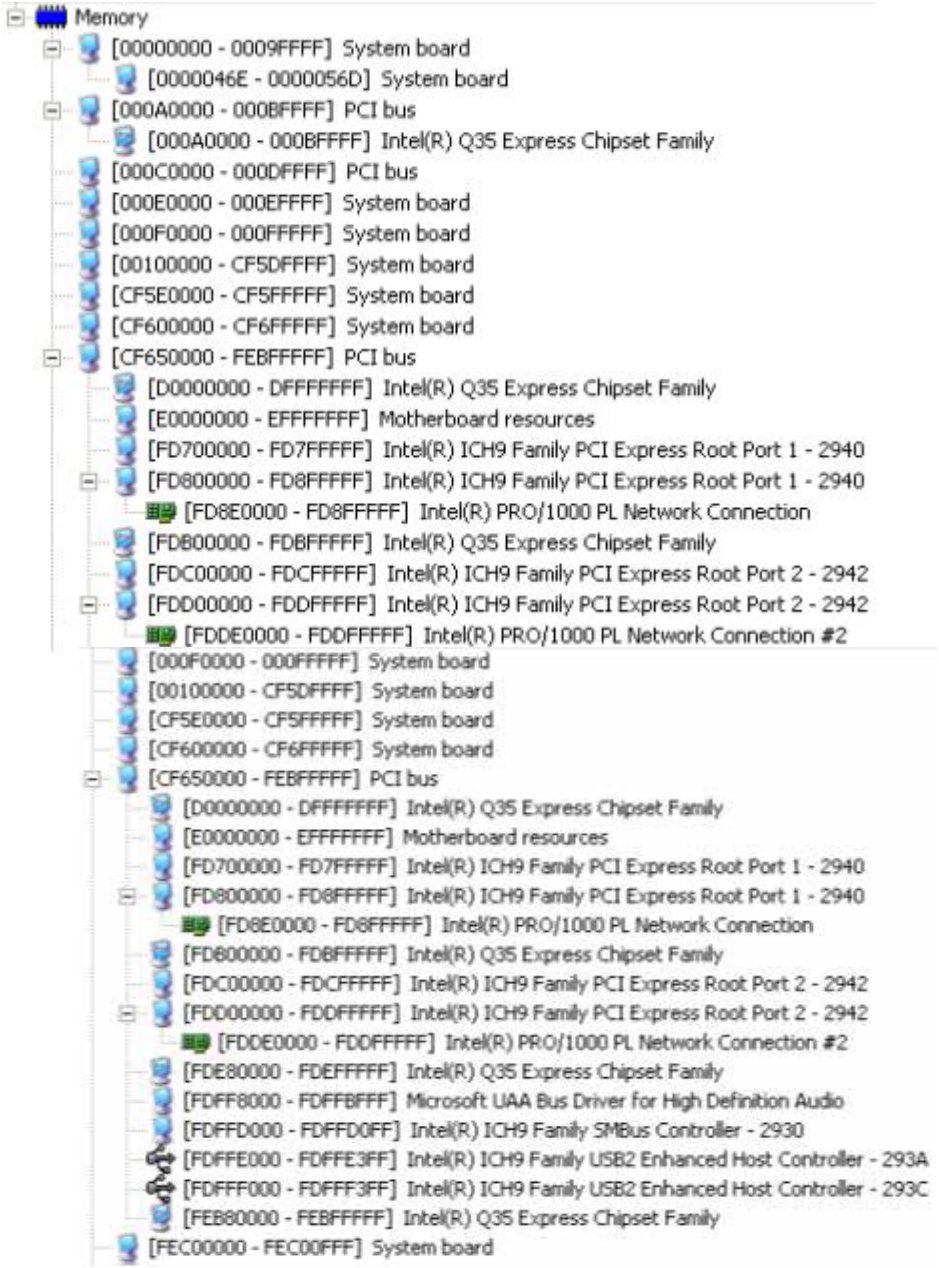
Memory
[00000000 - 0009FFFF] System board
[0000046E - 0000056D] System board
[000A0000 - 000BFFFF] PCI bus
[000A0000 - 000BFFFF] Intel(R) Q35 Express Chipset Family
[000C0000 - 000DFFFF] PCI bus
[000E0000 - 000EFFFF] System board
[000F0000 - 000FFFFF] System board
[00100000 - CF5DFFFF] System board
[CF5E0000 - CF5FFFFF] System board
[CF600000 - CF6FFFFF] System board
[CF650000 - FEBFFFFF] PCI bus
[D0000000 - DFFFFFFF] Intel(R) Q35 Express Chipset Family
[E0000000 - EFFFFFFF] Motherboard resources
[FD700000 - FD7FFFFF] Intel(R) ICH9 Family PCI Express Root Port 1 - 2940
[FD800000 - FD8FFFFF] Intel(R) ICH9 Family PCI Express Root Port 1 - 2940
[FD8E0000 - FD8FFFFF] Intel(R) PRO/1000 PL Network Connection
[FDB00000 - FDBFFFFF] Intel(R) Q35 Express Chipset Family
[FDC00000 - FDCFFFFF] Intel(R) ICH9 Family PCI Express Root Port 2 - 2942
[FDD00000 - FDDFFFFF] Intel(R) ICH9 Family PCI Express Root Port 2 - 2942
[FDDE0000 - FDDFFFFF] Intel(R) PRO/1000 PL Network Connection #2
[000F0000 - 000FFFFF] System board
[00100000 - CF5DFFFF] System board
[CF5E0000 - CF5FFFFF] System board
[CF600000 - CF6FFFFF] System board
[CF650000 - FEBFFFFF] PCI bus
[D0000000 - DFFFFFFF] Intel(R) Q35 Express Chipset Family
[E0000000 - EFFFFFFF] Motherboard resources
[FD700000 - FD7FFFFF] Intel(R) ICH9 Family PCI Express Root Port 1 - 2940
[FD800000 - FD8FFFFF] Intel(R) ICH9 Family PCI Express Root Port 1 - 2940
[FD8E0000 - FD8FFFFF] Intel(R) PRO/1000 PL Network Connection
[FDB00000 - FDBFFFFF] Intel(R) Q35 Express Chipset Family
[FDC00000 - FDCFFFFF] Intel(R) ICH9 Family PCI Express Root Port 2 - 2942
[FDD00000 - FDDFFFFF] Intel(R) ICH9 Family PCI Express Root Port 2 - 2942
[FDDE0000 - FDDFFFFF] Intel(R) PRO/1000 PL Network Connection #2
[FDE80000 - FDEFFFFF] Intel(R) Q35 Express Chipset Family
[FDFF8000 - FDFFBFFF] Microsoft UAA Bus Driver for High Definition Audio
[FDFFD000 - FDFFD0FF] Intel(R) ICH9 Family SMBus Controller - 2930
[FDFFE000 - FDFFE3FF] Intel(R) ICH9 Family USB2 Enhanced Host Controller - 293A
[FDFFF000 - FDFFF3FF] Intel(R) ICH9 Family USB2 Enhanced Host Controller - 293C
[FEB80000 - FEBFFFFF] Intel(R) Q35 Express Chipset Family
[FEC00000 - FEC00FFF] System board

B3.<System IRQ Resources>

Interrupt request (IRQ)
(ISA) 0 High precision event timer
(ISA) 1 Standard 101/102-Key or Microsoft Natural PS/2 Keyboard
(ISA) 3 Communications Port (COM2)
(ISA) 4 Communications Port (COM1)
(ISA) 6 Standard floppy disk controller
(ISA) 8 High precision event timer
(ISA) 9 Microsoft ACPI-Compliant System
(ISA) 13 Numeric data processor
(PCI) 11 Intel(R) ICH9 Family SMBus Controller - 2930
(PCI) 16 Intel(R) ICH9 Family PCI Express Root Port 1 - 2940
(PCI) 16 Intel(R) ICH9 Family USB Universal Host Controller - 2937
(PCI) 16 Intel(R) PRO/1000 PL Network Connection
(PCI) 16 Intel(R) Q35 Express Chipset Family
(PCI) 17 Intel(R) ICH9 Family PCI Express Root Port 2 - 2942
(PCI) 17 Intel(R) PRO/1000 PL Network Connection #2
(PCI) 18 Intel(R) ICH9 Family USB Universal Host Controller - 2936
(PCI) 18 Intel(R) ICH9 Family USB2 Enhanced Host Controller - 293C
(PCI) 19 Intel(R) ICH9 Family 2 port Serial ATA Storage Controller 2 - 2926
(PCI) 19 Intel(R) ICH9 Family USB Universal Host Controller - 2939
(PCI) 19 Intel(R) ICH9 Family USB Universal Host Controller - 2935

Appedix C <Flash BIOS>

C.1 <BIOS Auto Flash Tool>

The board is based on Award BIOS and can be updated easily by the BIOS auto flash tool. You can download the tool online at the address below:

http://www.award.com
http://www.commell.com.tw/support/support.htm

File name of the tool is "awdflash.exe", it's the utility that can write the data into the BIOS flash ship and update the BIOS.

C.2 <Flash Method>

1. Please make a bootable floppy disk.
2. Get the last .bin files you want to update and copy it into the disk.
3. Copy awardflash.exe to the disk.
4. Power on the system and flash the BIOS. (Example: C:/ awardflash XXX.bin)
5. Re-star the system.

Any question about the BIOS re-flash please contact your distributors or visit the web-site at below:

http://www.commell.com.tw/support/support.htm

Appendix D <Programming GPIO's>

The GPIO'can be programmed with the MSDOS debug program using simple IN/OUT commands.The following lines show an example how to do this.

GPIO0…..GPIO7 bit0……bit7

-o 2E 87 ;enter configuration

-o 2E 87

-o 2E 07

-o 2F 09 ;enable GPIO function

-o 2E 30

-o 2F 02 ;enable GPIO configuration

-o 2E F0

-o 2F xx ;set GPIO as input/output; set '1' for input,'0'for output

-o 2E F1

-o 2F xx ;if set GPIO's as output,in this register its value can be set

Optional :

-o 2E F2

-o 2F xx ; Data inversion register ; '1' inverts the current valus of the bits ,'0' leaves them as they are

-o 2E 30

-o 2F 02 ; active GPIO's

For further information, please refer to Winbond W83627DHG datasheet.

Appendix E <Watch Dog timer Setting >

The watchdog timer makes the system auto-reset while it stops to work for a period. The integrated watchdog timer can be setup as system reset mode by program.

Timeout Value Range

- 1 to 255
- Second or Minute

Program Sample

Watchdog timer setup as system reset with 5 second of timeout

2E, 87	
2E, 87	
2E, 07	
2F, 08	Logical Device 8
2E, 30	Activate
2F, 01	
2E, F5	Set as Second*
2F, 00	
2E, F6	Set as 5
2F, 05	

* Minute: bit 3 = 0; Second: bit 3 = 1

You can select Timer setting in the BIOS, after setting the time options, the system will reset according to the period of your selection.

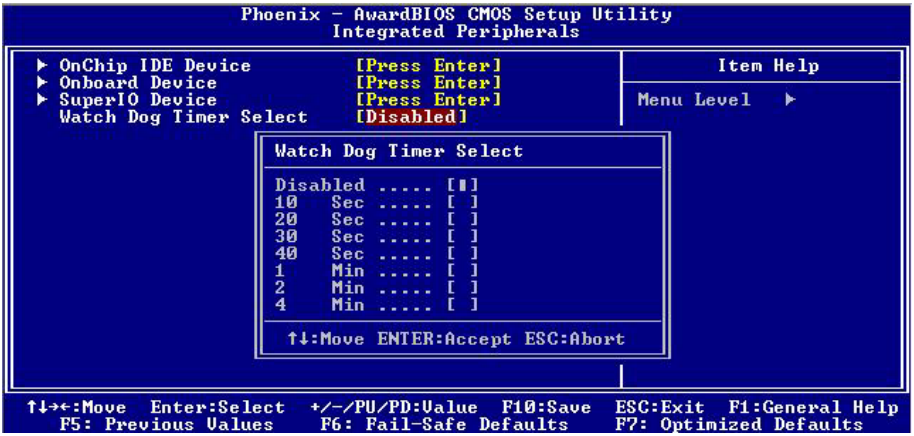
Phoenix - AwardBIOS CMOS Setup Utility
Integrated Peripherals
OnChip IDE Device [Press Enter]
Onboard Device [Press Enter]
SuperIO Device [Press Enter]
Watch Dog Timer Select [Disabled]
Item Help
Menu Level
Watch Dog Timer Select
Disabled ..... [ ]
10 Sec ..... [ ]
20 Sec ..... [ ]
30 Sec ..... [ ]
40 Sec ..... [ ]
1 Min ..... [ ]
2 Min ..... [ ]
4 Min ..... [ ]
↑↓:Move ENTER:Accept ESC:Abort
↑↓→←:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help
F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults

Contact Information

Any advice or comment about our products and service, or anything we can help you please don't hesitate to contact with us. We will do our best to support you for your products, projects and business.

Taiwan Commate Computer Inc.

Address	19F, No. 94, Sec. 1, Shin Tai Wu Rd., Shi Chih Taipei Hsien, Taiwan
TEL	+886-2-26963909
FAX	+886-2-26963911
Website	http://www.commell.com.tw
E-Mail	info@commell.com.tw (General Information) tech@commell.com.tw (Technical Support)

Commell is a brand name of Taiwan commate computer Inc.